


## SOME EXAMPLES FOR SIZES OF ALUTITAN EXTRUDED PROFILES

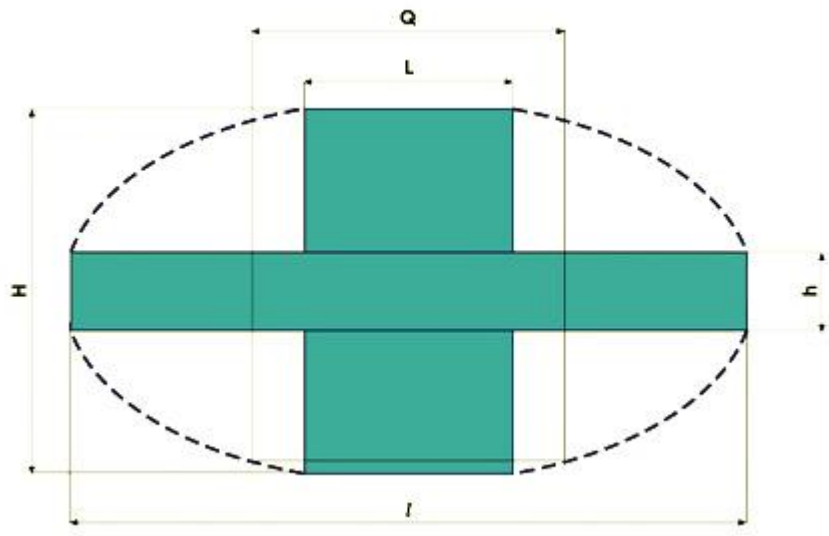

|                  | Rectangular Section:<br>Horizontal Placement |                  | Rectangular Section:<br>Vertical Placement |                  | Square<br>Section |
|------------------|----------------------------------------------|------------------|--------------------------------------------|------------------|-------------------|
|                  | Minimum<br>Height                            | Maximum<br>Width | Maximum<br>Height                          | Minimum<br>Width | Maximum<br>Side   |
| Type of Products | h                                            | l                | H                                          | L                | Q                 |
| Hollow Profiles  | 20                                           | 225              | 130                                        | 120              | 120 x 120         |
| Open Profiles    | 40                                           | 225              | 130                                        | 120              | 125 x 125         |

The figures used are approximate and for evaluation guidelines only.

Boundary conditions are to be reviewed by Alutitan.

Factors affecting the viability of a product are:

- Overall dimensions
- Profile section
- Thickness
- Weight per meter
- Requested quality